




Spil track luminaire

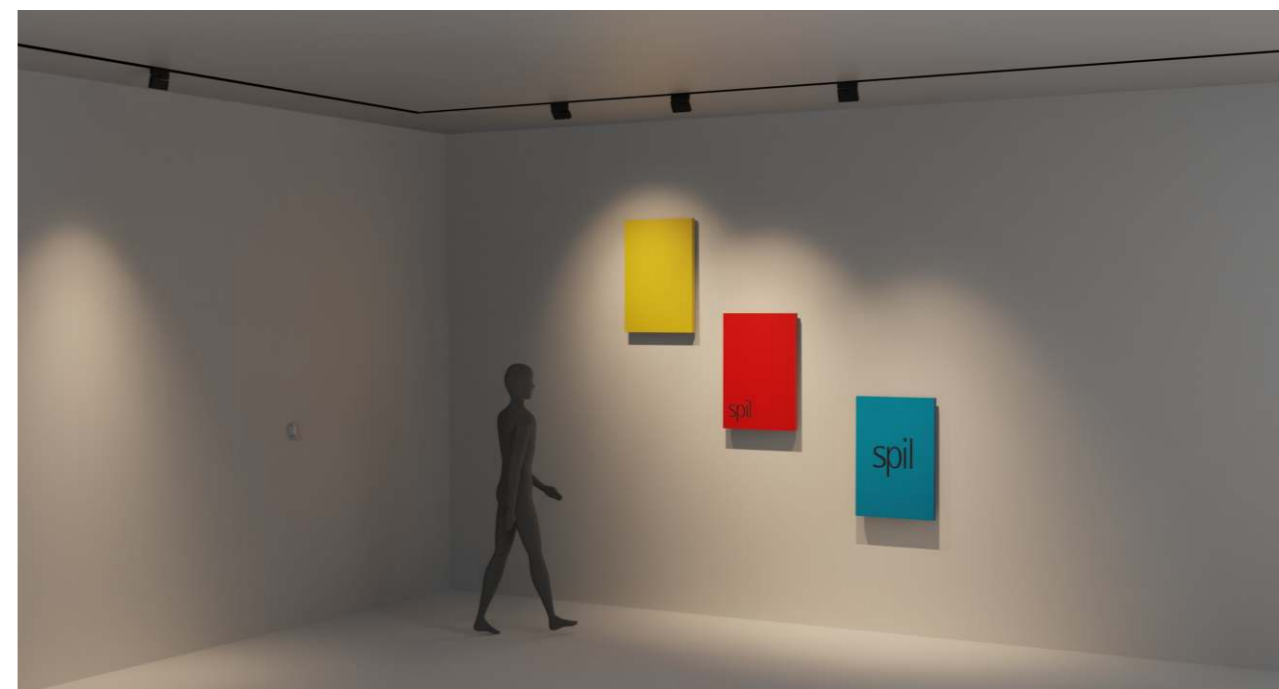

EN Luminaire with aesthetically beautiful presence when installed, 25mm thick with easy installation. The luminaire gives a soft smooth lighting output for modern interiors with clean lines . Also comes in surface and track mounted installation options . Tilt-able and pivot-able for customized lighting output.

IT Apparecchio di illuminazione con una bella presenza esteticamente una volta installato, spessore 25mm con easy installazione. L'apparecchio fornisce un'illuminazione morbida e uniforme per interni moderni con linee pulite. Disponibile anche in opzioni di installazione su superficie e su binario. Inclinabile e orientabile per un'emissione luminosa personalizzata.

DE Armatur met esthetisch mooie aanwezigheid bij installatie, 25 mm dik met easy installatie. De armatuur geeft een zachte, egale lichtopbrengst voor moderne interieurs met strakke lijnen. Komt ook in opbouw- en railmontage-opties. Kantelbaar en zwenkbaar voor aangepaste lichtopbrengst.

Spil track luminaire



Structure and characteristics

The features described here are typical of products in this range. Special versions may offer additional or varying features. A comprehensive description of the features of individual products can be found on website or contact our representative.

1 Optical Lens

- For variety of controlled beams
- Soft light technology
- High density poly-carbonate

2 ZESS LED-module

- Mid power LED: warm white (3000K) or neutral white (4000K)

3 Track Adaptor

- Strong Track Adaptor
- 2,3 or 4 Wire System

4 Control gear

- Switchable / Phase Dimmable / DALI

5 Body

- Pure-Aluminum body
- Dual layer polyester powder coat
- Dial : Poly carbonate with paint

Protection mode IP30

- Dust Resistant

Variants on request

- High-power LEDs: 3000K CRI 97 or 2700K, 3500K, 4000K with CRI 92
 - Housing: 10,000 further colours
- Please contact your ZESS consultant.

Spil track luminaire



Slim design

Very slim and sleek appearance, adds impression to surroundings, brings life to clean modern ceilings and required illuminance to the specific area.

Variety of installation options

Bundle of installation techniques with, so many beams options from flood, wide flood to wide asymmetrical beams to provide every possible indoor need for focused or wide space illumination with excellent uniformity.



Excellent visual comfort



Tool free installation



Switchable



Cut-off 30°



Different light distributions



Phase dimmable



Different light colours



Pivotable + Tiltable



DALI dimmable



Mid-power LEDs



EMC Optimised




Efficient lens design

Spil track luminaire

Series Série	Model No. Modèle n°	Lamp Lamp	Power Watt	Lumen Lumen @3000k	Beam Faisceau				D	Dimension Dimension			Weight Poids
					S	M	W	F		w	h	t	
Spil	03112	5 x LED	12	2130	15°	20°	30°	45°	Diffused100°	115	136	38	1.16 k.g.
	03108	5 x LED	08	2900	15°	20°	30°	45°	Diffused100°	115	136	38	1.16 k.g.
	03106	5 x LED	06	3340	15°	20°	30°	45°	Diffused100°	115	136	38	1.16 k.g.

* For drive specification please refer respective datasheet.

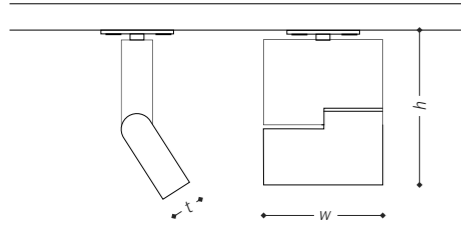

Spil track luminaire

Product Code construction
 Costruzione del codice
 Construction du code produit
 Bau der Produkt-Code
 Construcción del código de producto

Spil - 03112 - X X X X X

Colour Temperature Temperatura colore Température couleur Temperaturabhängige Farbe Temperatura de color	1	2	3	4	5
	2700K CRI 85	3000K CRI 85	3000K CRI 90	4000K CRI 85	6000K CRI 85
Beam angle Apertura di fascio Angle de faisceau Strahlwinkel Angulo del haz	1	2	3	4	5
	15°	20°	30°	45°	Diffused100°
Housing colour Colore alloggiamento Couleur du boîtier Gehäusefarbe Color de la carcasa	1	2			
	White Bianco Blanc Weiß Blanco	Black Nero Noir Schwarz Negro			
Control Mode Modalità di controllo Mode de contrôle Steuermodus Acabados	1	2	3		
	Switch	DALI	Phase		
Connection System Sistema di connessione Système de connexion Verbindungssystem Sistema de conexión	1	4			
	2-Wire System	4-Wire System			

Note:
4-wire system for DALI control mode

Sistema a 4 fili per modalità di controllo DALI
 Système à 4 fils pour le mode de contrôle DALI
 4-Draht-System für den DALI-Steuermodus
 Sistema de 4 hilos para modo de control DALI