


zGraze linear façade luminaire

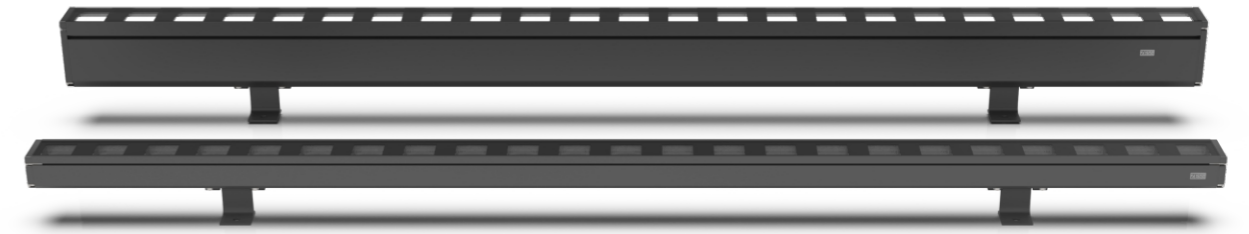


EN zGraze series offers a wide range of linear luminaries for exterior and interior seamless illumination. Offers a wide variety of Monochromatic and DMX controlled multi-color RGBW colour options. Comes with built-in serial connection for power and control cables. Fitted with ZESS opti-curve lens technology to maximize equal horizontal and vertical illumination. The luminaire rated as CLASS I & II with internal and external led driver. Colour temperature options : 2700K to 4000K and RGBW. The LED life time 50,000 Hours.

IT La serie zGraze offre una vasta gamma di apparecchi di illuminazione lineari per l'illuminazione continua esterna ed interna. Offre una vasta gamma di opzioni di colore RGBW multicolore controllate monocromatiche e DMX. Viene fornito con connessione seriale integrata per cavi di alimentazione e controllo. Dotato di tecnologia dell'ottica a curva ZESS per massimizzare l'illuminazione orizzontale e verticale. L'apparecchio è classificato come CLASSE I e II con driver led interno ed esterno. Opzioni di temperatura del colore: da 2700 K a 4000 K e RGBW. La durata del LED 50.000 ore.

DE De zGraze-serie biedt een breed scala aan lineaire armaturen voor naadloze verlichting binnen en buiten. Biedt een breed scala aan Monochromatische en DMX-gestuurde meerkleuren RGBW-kleuropties. Wordt geleverd met ingebouwde seriële aansluiting voor stroom- en besturingskabels. Uitgerust met ZESS opti-curve lenstechnologie om gelijke horizontale en verticale verlichting te maximaliseren. De armatuur beoordeeld als KLASSE I & II met interne en externe led driver. Kleurtemperatuuropties: 2700K tot 4000K en RGBW. De LED-levensduur 50.000 uur.

zGraze linear façade luminaire

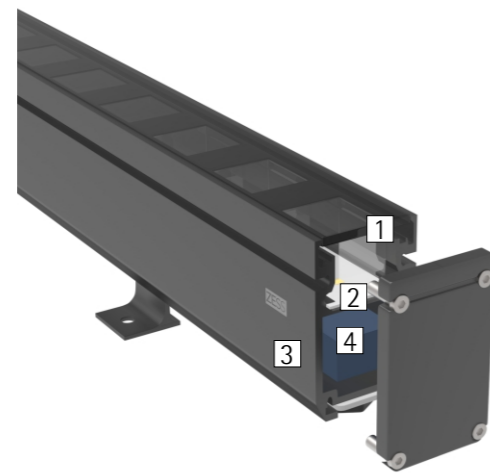

Structure and characteristics

The features described here are typical of products in this range. Special versions may offer additional or varying features. A comprehensive description of the features of individual products can be found on website or contact our representative.

1 ZESS Opti-curve lens

- Opti-curve technology offers symmetrical and A-symmetrical beam in one lens.
- Patent technology

2 ZESS LED-module

- High power LED: warm white (3000K) or neutral white (4000K)
- 4 in 1 RGBW LED

3 Body

- Corrosion resistant cast-aluminum
- Dual layer Powder coated
- Stainless steel 304 screws
- 4mm hardened glass cover

4 Control gear

- Switchable, dimmable for 24V versions
- DMX for RGBW versions with separate cable



Protection mode IP66

Dust-tight and water jet-proof

Variants on request

- High-power LEDs: 3000K CRI 85 or 2700K, 3500K, 4000K with CRI 85
 - Housing: 10,000 further colours
- Please contact your ZESS consultant.

zGraze linear façade luminaire

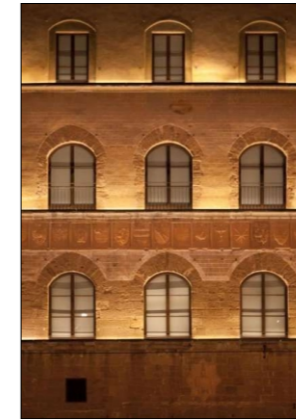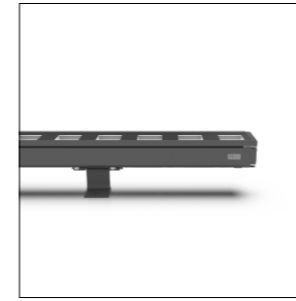

Opti-curve lens technology
zGraze eliminates burning light effect from the nearest illuminated surface and softens light for better grazing to the furthestmost area.



Multiple lumen package with RGB
zGraze is packed with a series of options for monochromatic and RGBW lumen outputs. Helps in achieving maximum customization in a multiple scene project.



Red, Green, Blue and White RGBW
DMX control for 24V and 220VAC voltage system with 4-in-1 led modules



Excellent visual comfort



High-power LEDs



Switchable



EMC-optimised



Protection mode IP66



Excellent thermal management



Various construction sizes



Different light distributions



RGBW with DMX System




Different light colours



Serial connectable

zGraze linear façade luminaire


Series Série	Model No. Modèle n°	Lamp Lamp	Power Watt	Colour Couleur	Beam Faisceau			Dimension Dimension				Weight Poids
					AS	ASN	W	l	h	h1	w	
zGraze Mini	028118	18 x LED	18	W27/W30/W40	18° x 55°	15° x 60°	30°	1000	82	30	38	1.49k.g.
	028218	18 x LED	18	RGBW	18° x 55°	15° x 60°	30°	1000	82	30	38	1.49k.g.
	028124	24 x LED	24	W27/W30/W40	18° x 55°	15° x 60°	30°	1000	82	30	38	1.49k.g.
	028224	24 x LED	24	RGBW	18° x 55°	15° x 60°	30°	1000	82	30	38	1.49k.g.
	028136	36 x LED	36	W27/W30/W40	18° x 55°	15° x 60°	30°	1000	82	30	38	1.49k.g.
	028236	36 x LED	36	RGB/RGBW	18° x 55°	15° x 60°	30°	1000	82	30	38	1.49k.g.
zGraze	028318	18 x LED	18	W27/W30/W40	18° x 55°	15° x 60°	30°	1000	96	52	38	1.81k.g.
	028418	18 x LED	18	RGBW	18° x 55°	15° x 60°	30°	1000	96	52	38	1.81k.g.
	028324	24 x LED	24	W27/W30/W40	18° x 55°	15° x 60°	30°	1000	96	52	38	1.81k.g.
	028424	24 x LED	24	RGBW	18° x 55°	15° x 60°	30°	1000	96	52	38	1.81k.g.
	028336	36 x LED	36	W27/W30/W40	18° x 55°	15° x 60°	30°	1000	96	52	38	1.81k.g.
	028436	36 x LED	36	RGBW	18° x 55°	15° x 60°	30°	1000	96	52	38	1.81k.g.
	028372	72 x LED	72	W27/W30/W40	18° x 55°	15° x 60°	30°	1000	108	72	65	3.60k.g.
	028472	72 x LED	72	RGBW	18° x 55°	15° x 60°	30°	1000	108	72	65	3.60k.g.

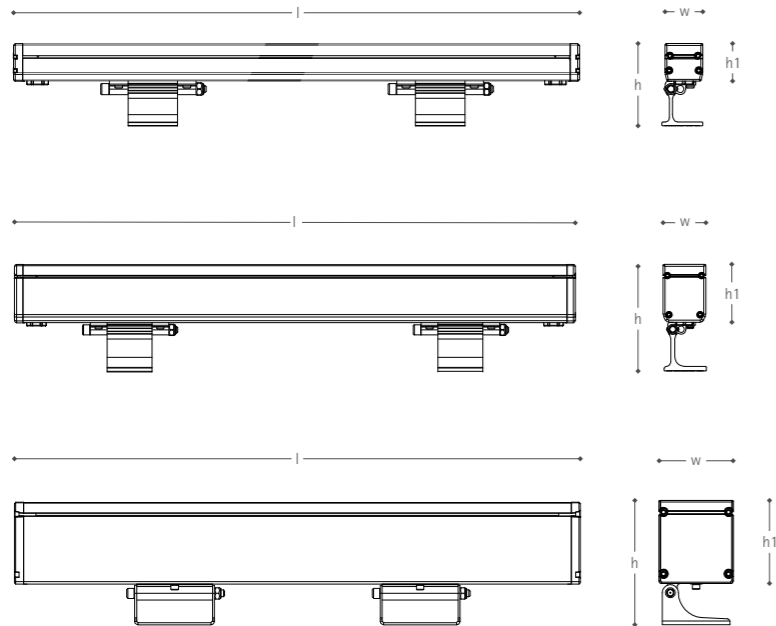

zGraze linear façade luminaire

Product
Code construction
Costruzione del codice
Construction du code produit
Bau der Produkt-Code
Construcción del código de producto

zGraze Mini - 028118- X, X, X- Accessories

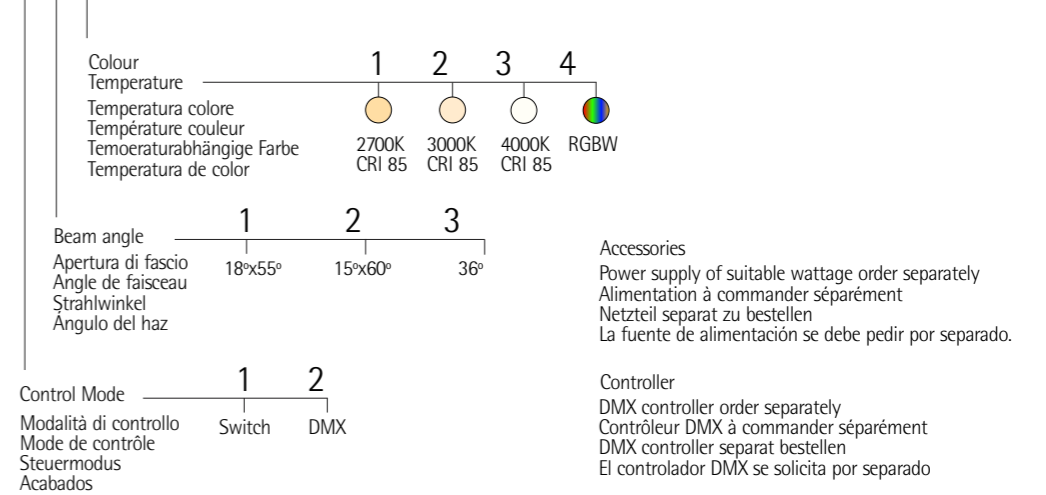

zGraze - 028318- X, X, X- Accessories

