



Erde Mini Façade luminaire



EN Featuring timeless design and equipped with reflectors for extraordinary light effects, Erde mini is a classic in the Zess collection. This attractive family has fixtures for indoor as well as outdoor lighting and comes in different colours. The Erde mini is equipped with a single high powered LED cluster protected by hardened glass, resulting in an IP67 fixture with diffused light effect, making it suitable for both wet areas and outdoor use. The luminaire rated as CLASS I & II with internal driver. Colour temperature options : 2700K to 4000K . The LED life time 50,000 Hours.

DE Met tijdloos design en voorzien van reflectoren voor buitengewoon licht effecten, Erde mini is een klassieker in de Zess-collectie. Deze aantrekkelijke familie heeft armaturen voor zowel binnen- als buitenverlichting en is verkrijgbaar in verschillende kleuren. De Erde mini is uitgerust met een enkele krachtige led-cluster die wordt beschermd door gehard glas, resulterend in een IP67-armatuur met diffuus lichteffect, waardoor het geschikt is voor zowel natte ruimtes als buitengebruik. De armatuur beoordeeld als KLASSE I & II met interne driver. Kleurtemperatuur opties: 2700K tot 4000K. De LED-levensduur 50.000 uur.

IT Caratterizzato da un design senza tempo e dotato di riflettori per una luce straordinaria effetti, Erde mini è un classico della collezione Zess. Questa famiglia attraente ha apparecchi per illuminazione interna ed esterna ed è disponibile in diversi colori. Erde mini è dotato di un singolo cluster LED ad alta potenza protetto da vetro temprato, che si traduce in un apparecchio IP67 con effetto luce diffusa, rendendolo adatto sia per zone umide che per uso esterno. L'apparecchio è classificato come CLASSE I e II con driver interno. Temperatura di colore opzioni: da 2700 K a 4000 K. La durata del LED 50.000 ore.



Structure and characteristics

The features described here are typical of products in this range. Special versions may offer additional or varying features. A comprehensive description of the features of individual products can be found on website or contact our representative.

1 ZESS lens

- Reflector: Pure poly-carbonate shiny white for controlled illumination

2 ZESS LED-module

- High power LED: warm white (3000K) or neutral white (4000K)

3 Glass

- Clear / Frosted glass options
- 5mm tempered glass hardened for scratch resistance

4 Body

- Corrosion resistant cast-aluminum
- Dual layer Powder coated
- Stainless steel 316 grade top cover, hardened.

5 Control gear


- Switchable, dimmable for 24V versions

Protection mode IP65

Dust-tight and water jet-proof

Variants on request

- High-power LEDs: 3000K CRI 85 or 2700K, 3500K, 4000K with CRI 85
 - Housing: 10,000 further colours
- Please contact your ZESS consultant.

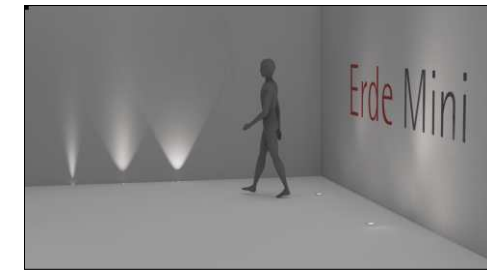

Uniform arrangements
For uniform washlighting of the wall, the luminaire spacing (d) may be up to 2 times the mounting height (h).

Erde Mini façade luminaires with upward illumination with soft light, product wide range of applicable possibilities and variety of versions make it the most usable luminaire for indoor and outdoor accent lighting.



Excellent visual comfort



ZESS high-power LEDs



Switchable



EMC-optimised



Protection mode IP67



Excellent thermal management



Various construction sizes



Different light distributions




Different light colours



Walk-over

Erde Mini Façade luminaire

Series Série	Model No. Modèle n°	Lamp Lamp	Power Watt	Lumen Lumen @4000k	Beam Faisceau					Dimension Dimension					Weight Poids
					NS	N	MW	W	F	w1	w2	d	h	ap	
Erde Mini round	001311	LED	1.2	110	8°	15°	30°	45°	60°	-	-	45	65	42	0.9k.g.
	001312	LED	2.6	230	8°	15°	30°	45°	60°	-	-	45	65	42	0.9k.g.
	001321	LED	1.2	110	8°	15°	30°	45°	60°	-	-	38	65	34	0.7k.g.
	001322	LED	2.6	230	8°	15°	30°	45°	60°	-	-	38	65	34	0.7k.g.
Erde Mini square	001331	LED	1.2	105	8°	15°	30°	45°	60°	45	45	-	65	42	0.9k.g.
	001332	LED	2.6	220	8°	15°	30°	45°	60°	45	45	-	65	42	0.9k.g.
	001341	LED	1.2	105	-	15°	30°	45°	60°	38	38	-	65	34	0.7k.g.
	001342	LED	2.6	220	-	15°	30°	45°	60°	38	38	-	65	34	0.7k.g.

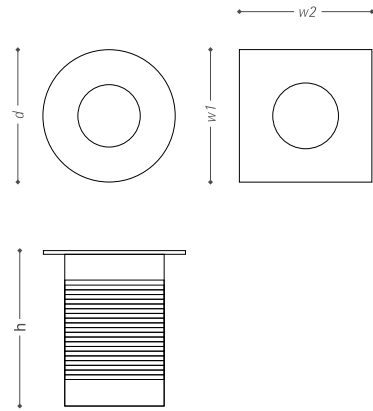

Erde Mini Façade luminaire

Product
Code construction
 Costruzione del codice
 Constrction du code produit
 Bau der Produkt-Code
 Construcción del código de producto

Erde Mini - 001311- X X X - Accessories

Colour Temperature Temperatura colore Température couleur Temperaturabhängige Farbe Temperatura de color	1	2	3	4	
	2700K CRI 85	3000K CRI 85	3500K CRI 85	4000K CRI 85	
Beam angle Apertura di fascio Angle de faisceau Strahlwinkel Ángulo del haz	1	2	3	4	5
	15°	30°	45°	8°	AS25x45°
Control Mode Modalità di controllo Mode de contrôle Steuermodus Acabados	1	2	3		
	Switch 220vac	Switch 24vdc	DIM 24vdc		